



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 7002
20 - 2500 MHz
50 WATTS
BANDED POWER RF AMPLIFIER

**Solid State
 Broadband High
 Power RF Amplifier**

The 7002 is a 50W multi channel broadband system that covers the 20 – 2500 MHz frequency range with a single RF input and Single RF output port.

The system includes RF high power switches controlled by the system controller. The RS232/ Ethernet and/or Front panel key-pad provides full control and reduces the power consumption to the minimum by shutting down the un-selected channel.

The System is configured in a Rear panel Connectors configuration.


	<u>Parameter</u>	<u>Specification @ 25° C</u>
<u>Electrical</u>		
1	Frequency Range	20 – 2500 MHz
2	Saturated Power Output	50 Watts typ.
3	Nominal RF drive for rated power	0 dB typ.
4	Power Flatness	+/-1.5dB
5	Power Output @ P1dB	20W minimum
6	Input VSWR	2:1 max
7	Harmonics	-15 dBc typ. @ 20 to 1000 MHz -20 dBc typ. @ 1 to 2.5 GHz
8	Spurious Signals	> -60 dBc typical
9	Temperature Protection	Baseplate above 80° C
10	AC Power Consumption	500 Watt maximum
11	Maximum RF Input	10 dBm max
12	Antenna Switching time	50mS max
<u>Mechanical</u>		
13	Dimensions	19" x 20" x 5.25"
14	Weight	50 lb. max
15	Connectors	Type-N
16	Grounding	Chassis
17	Cooling	Internal Forced Air
<u>Environmental</u>		
18	Operating Temperature	0° C to +50° C
19	Operating Humidity	95% Non-condensing
20	Operating Altitude	Up to 10,000' Above Sea Level
21	Shock and Vibration	Normal Truck transport





5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)577-9887
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 7002
20 - 2500 MHz
50 WATTS
BANDED POWER RF AMPLIFIER

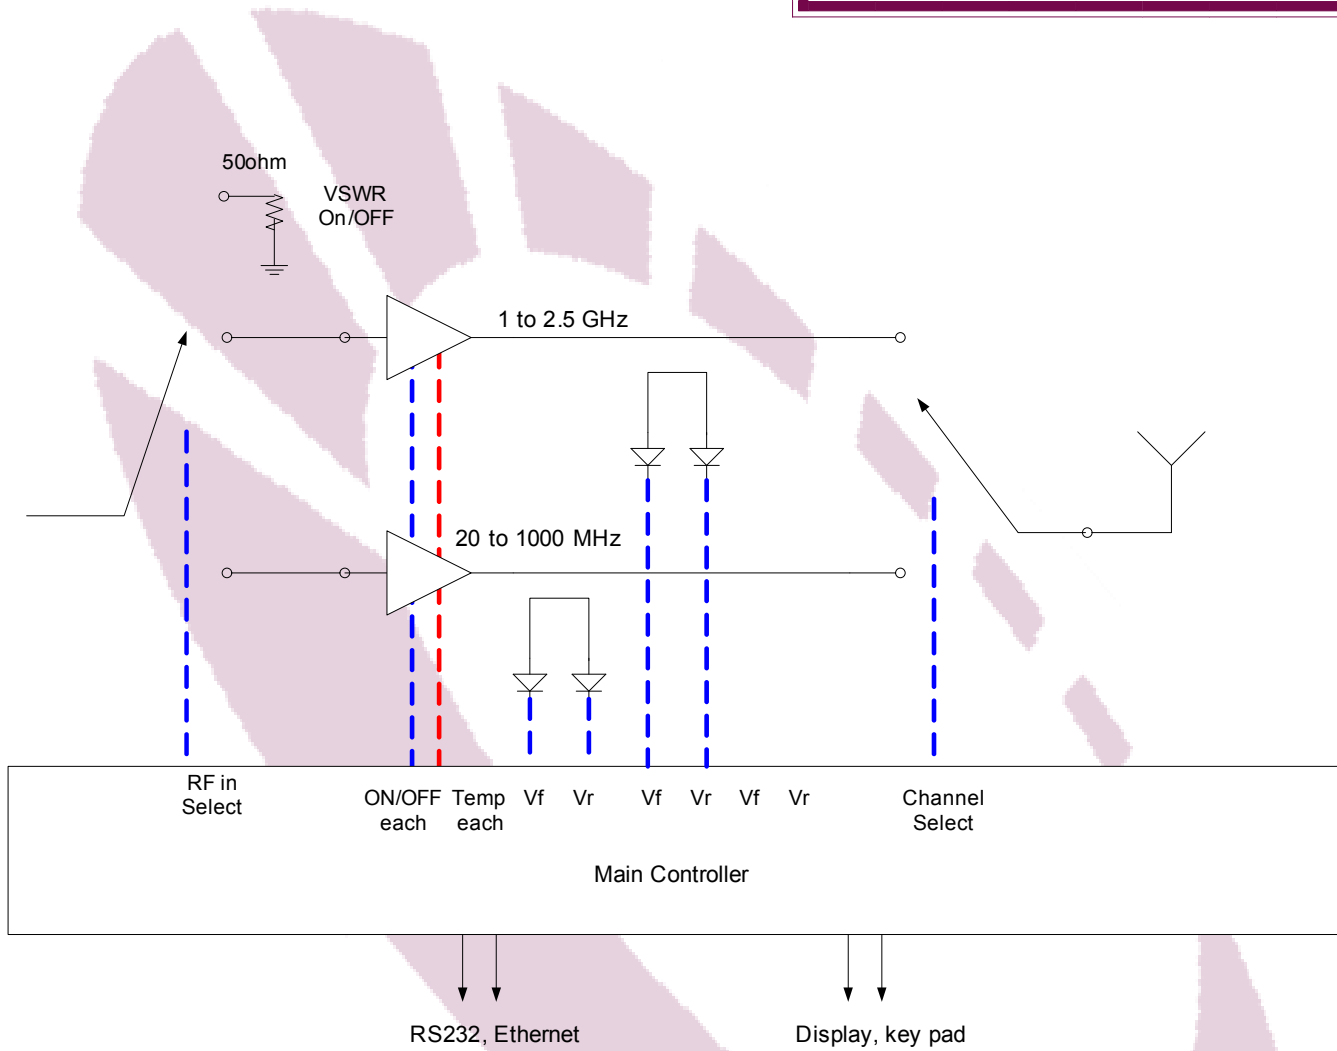

CIRCUIT PROTECTIONS

- ◇ Protection against VSWR of > 2:1 latched with Reset
- ◇ Thermal Overload
- ◇ Over Current
- ◇ Over Voltage

CONTROL & INDICATIONS

- ◇ AC Circuit Breaker
- ◇ Band Select
- ◇ Forward power of selected channel
- ◇ Reflected Power of selected channel
- ◇ VSWR Fault Reset