

EFT 500N5

ELECTRICAL FAST TRANSIENT GENERATOR



FOR TESTS ACCORDING TO ...

- > EN 61000-4-4
- > EN 61000-6-1
- > EN 61000-6-2
- > IEC 60601-1-2:2002
- > IEC 61000-4-4
- > IEC 61326
- > IEC 61850-3







EFT 500N5 - EFT/BURST TESTER

The EFT 500N5 is the state-of-the-art EFT/Burst tester with a built-in coupling/decoupling network for single phase or three-phase mains supply lines and a HV terminal to connect a capacitive coupling clamp. The spike frequency can be varied from as low as 100Hz up to 1,000kHz. The EFT 500N5 is capable to generate 10,000 spikes per second or up to 1,000 spikes per burst. Its performance fully complies with IEC 61000-4-4 Ed.2:2004. Pre-programmed Standard Test routines and a number of selected User Test routines make the EFT 500N5 an optimum standalone solution for both testing during development and final testing of products and sub-assemblies.

HIGHLIGHTS

- > **10,000 PULSES/SEC.**
- > **4.8KV BURST VOLTAGE**
- > **SPIKE FREQUENCY UP TO 1MHZ**
- > **BUILT-IN 1PH OR 3PH COUPLER UP TO 50A**
- > **PULSE VERIFICATION ACC. TO ED.2 ON EACH COUPLING PATH**

APPLICATION AREAS

- | | |
|---|--|
|  INDUSTRY |  TELECOM |
|  MEDICAL |  COMPONENTS |
|  BROADCAST | |
|  RESIDENTIAL | |

TECHNICAL DETAILS

EFT 500N MODELS

| | |
|-------------|-----------------------------------|
| EFT 500N5 | With 1-phase coupler, 250V/16A |
| EFT 500N5.1 | With 3-phase coupler, 3x 440V/32A |
| EFT 500N5.2 | With 3-phase coupler, 3x 440V/50A |
| | Other couplers on special request |

TEST LEVEL

| | |
|------------------|--------------------|
| Voltage range | 200V - 4,800V |
| Into 50ohm | 100V - 2,400V |
| Pulse shape | Into 50ohm load |
| Rise time tr | 5ns ± 30% |
| Pulse width td | 50ns ± 30% |
| Pulse shape | Into 1,000ohm load |
| Rise time tr | 5ns ± 30% |
| Pulse width td | 35ns to 150ns |
| Source impedance | 50 Ohm ± 20% |
| Polarity | Positive/negative |

TRIGGER

| | |
|-----------------------|---|
| Release of Burst | Automatic, manual, external |
| Burst duration | Td = 0.1ms - 999.9ms |
| Burst repetition rate | Tr = 10ms - 9,999ms |
| Spike frequency | f = 0.1kHz - 1,000kHz |
| Test duration | T = 0:01 min - 99:59 min T > 99:59 min - endless |

OUTPUT

| | |
|---------------|--|
| Direct | Via HV coax connector |
| Coupler | L, N and PE, all combinations |
| DUT supply AC | 250V/16A, 50/60Hz |
| DUT supply DC | 250V/10A |
| DUT supply | Other DUT supply voltages on request |
| CRO Trigger | 15V trigger signal for oscilloscope; burst duration and pulse frequency can be checked |

TEST ROUTINES

| | |
|------------------------|--|
| Quick Start | Immediate start; easy to use and fast |
| User Test routines | Custom made test routine Change voltage after T Change frequency after T Frequency sweep within a burst Change burst duration after T Random release of bursts Synchronous burst mode Change polarity after T |
| Standard Test routines | As per IEC 61000-4-4, Automatic test Level X - Y |
| Service | Service, set-up, self test |

INTERFACES

| | |
|--------------------|-----------------------------|
| Serial interface | USB |
| Parallel interface | IEEE 488, address 1 - 30 |
| CN interface | To control external CNI 503 |


GENERAL DATA

| | |
|--------------------|--|
| Dimensions, weight | EFT 500N5: 19"/3HU, 13kg EFT 500N5.1: 19"/6HU, 17kg EFT 500N5.2: 19"/6HU, 18kg |
| Supply voltage | 115/230V, +10/-15% |
| Fuses | 2 x T 2AT (230V); 2 x T 4AT (115V) |

OPTIONS

| | |
|-------------|--|
| HFK | Coupling Clamp as per IEC 61000-4-4 |
| KW 50 | 50ohm matching resistor for verification |
| KW 1000 | 1,000ohm matching resistor for verification |
| CA EFT kit | Kit for burst pulse verification consisting of KW50, KW1000 and adapter for DUT port with plastic case for storage |
| A6dB | 6dB attenuator |
| CNI 503 | Coupling/decoupling networks, 3x440V/32-63-100A |
| iec.control | Software to control the test, including standard library, test report facility and data conversion generator |

COMPETENCE WHEREVER YOU ARE

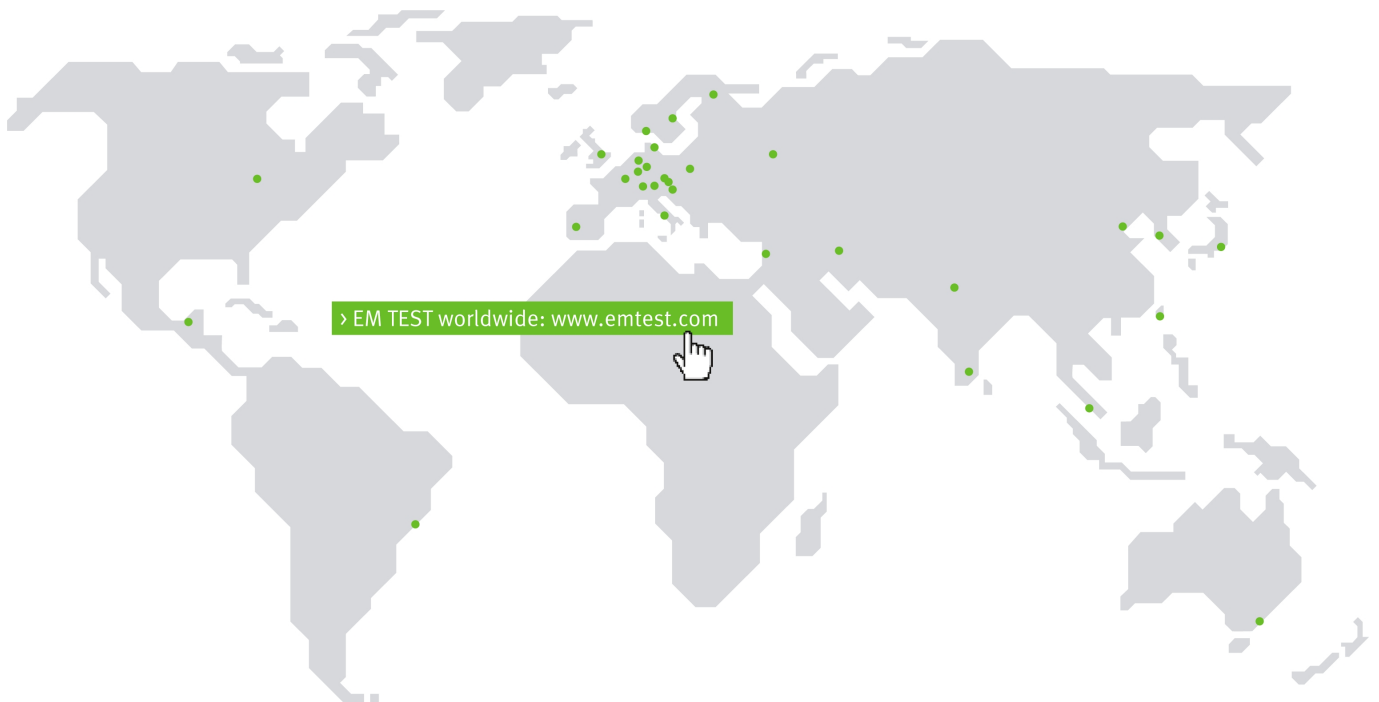

CONTACT EM TEST DIRECTLY

Switzerland

EM TEST AG › Sternenhofstraße 15 › 4153 Reinach › Switzerland
 Phone +41 (0)61/7179191 › Fax +41 (0)61/7179199
 Internet: www.emtest.ch › E-mail: sales@emtest.ch

Germany

EM TEST GmbH › Lünener Straße 211 › 59174 Kamen › Deutschland
 Phone +49 (0)2307/26070-0 › Fax +49 (0)2307/17050
 Internet: www.emtest.com › E-mail: info@emtest.de

France

EM TEST FRANCE › Le Trident - Parc des Collines › Immeuble B1 - Etage 3 ›
 36, rue Paul Cézanne › 68200 Mulhouse › France
 Phone +33 (0)389 31 23 50 › Fax +33 (0)389 31 23 55
 Internet: www.emtest.fr › E-mail: info@emtest.fr

P.R. China

EM TEST Representative Office Beijing › Rm 913, Leftbank ›
 No. 68 Bei Si Huan Xi Lu › Haidian District › Beijing 100080 › P.R. China
 Phone +86 (0)10 82 67 60 27 › Fax +86 (0)10 82 67 62 38
 Internet: www.emtest.com › E-mail: emtestbj@public.bta.net.cn

Malaysia

EM TEST (M) SDN BHD › Unit B2-6, Jalan Dataran SD2 › Dataran SD2, PJU9 ›
 Bandar Sri Damansara › 52200 Kuala Lumpur › Malaysia
 Phone +60 (03)62 73 22 01 › Fax +60 (03)62 74 22 01
 Internet: www.emtest.com › E-mail: sales@emtest.com.my

Poland

EM TEST Polska › ul. Lema 33, 26-613 Radom › Polska
 Phone +48 518 64 35 12 › E-mail: info.polska@emtest.de

Information about scope of delivery, visual design and technical data correspond with the state of development at time of release.
 Technical data subject to change without further notice.