


## CDN USB-C

for USB connection to central unit

Coupling / decoupling networks (CDN) for immunity tests acc. to EN 61000-4-6 / IEC 1000-4-6

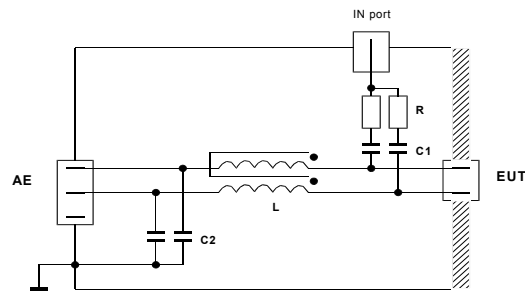

Typical circuit diagram

- **Order Number: USB-C**
- **50Ω-termination included**

Technical data:		
EUT / AE Connection	AC voltage:	250V <sub>eff</sub>
	DC voltage:	400V
	Rated current:	0.5A <sub>eff</sub>
	Connector (EUT/ AE):	USB-B/ USB-A
RF in	Frequency-range:	150kHz - 230MHz
	Connector:	BNC, 50Ω
	RF constant power:	6W
Common-mode impedance	150kHz - 26MHz:	130 - 170Ω
	26MHz - 230MHz:	105 - 210Ω
Insertion loss Generator / EUT	150kHz - 230MHz:	a = 10dB ± 1dB a = 10dB ± 2dB
Decoupling attenuation Generator / AE	150kHz - 80MHz:	a > 55dB
	80MHz - 230MHz:	a > 35dB
Transmission loss EUT/AE (50Ω-System)	DC - 10MHz:	a < 0.3dB
	10MHz - 100MHz:	a < 3dB
	10MHz - 100MHz:	a < 10dB