




FLOOR STRUCTURE COMPONENTS

USING AL5 EMI SHIELDED FOIL (Epoxy Floor with Shot In Anchors)

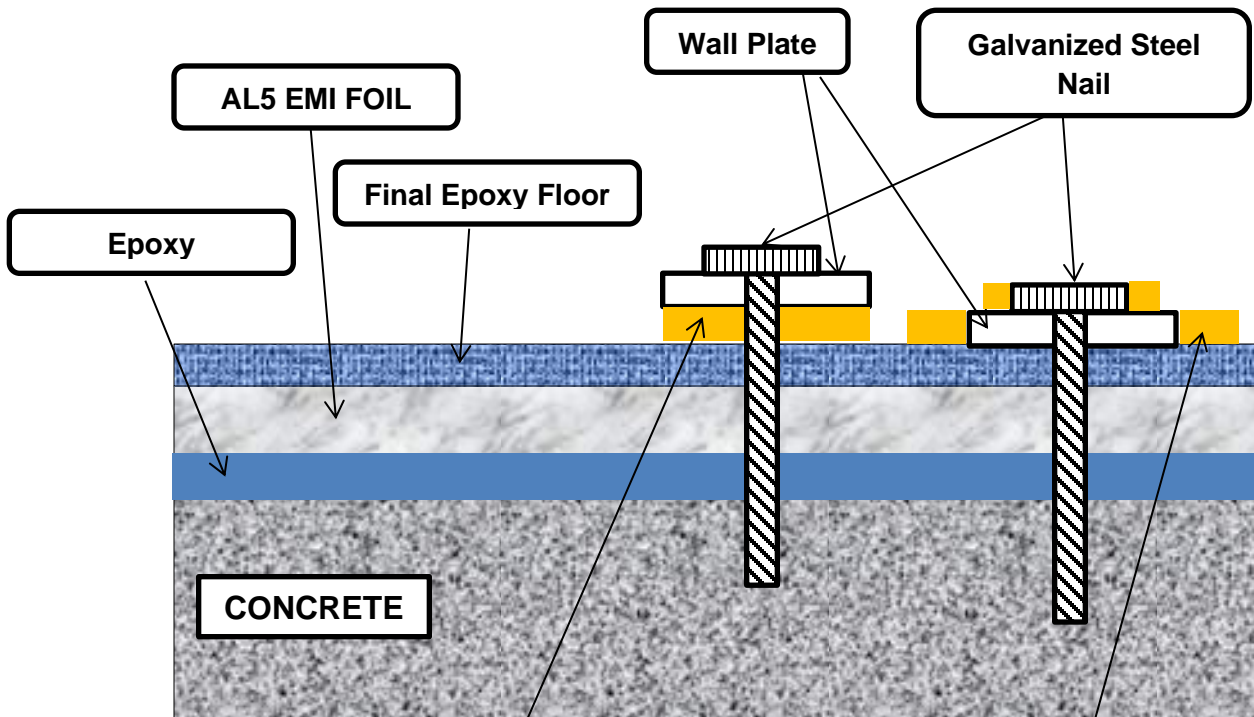

Apply Continuous Silicone RTV or Other Waterproof Sealer Between Floor & Wall Plate in the Areas Anchor Nails Penetrate the Wall Plate

Set Wall Plate into Location, then Shoot in the Galvanized Steel Nails

A Circular Bead of RTV can be used between the Floor & Wall Plate, but then the Nail Head Must also be Waterproof (RTV) Sealed

OR

Set Wall Plate into Location, Shoot in the Galvanized Steel Nail, Then Waterproof Seal the Entire Wall Plate & the Nail Heads

No Concrete Products in the Epoxy