

TECHNICAL BULLETIN 360-1

C-RAM HC

LIGHTWEIGHT, STRUCTURAL, BROADBANDED HONEYCOMB RADAR ABSORBER

C-RAM HC is a series of radar absorbing products made from Nomex/phenolic or glass/phenolic honeycomb with a proprietary lossy coating. Typically, Nomex/phenolic is used in most applications. The hexagonal open cell structure provides a high strength-to-weight ratio, making C-RAM HC an ideal material for aircraft parts, such as fairings, covers, and leading edges, which must combine strength, light weight, and low radar cross section. Honeycomb is also ideal for cavity backed spiral antenna applications. The open cells permit forced air cooling, allowing high-power applications. On special order skins can be provided on the core, typically glass, Kevlar, or AstroQuartz skins can be provided. Custom composite shapes are also available per customer drawings.

C-RAM HC TYPES

C-RAM HCGR X/Y:

Gradient loaded flat sheets with reflectivity as follows, where X = thickness and Y = reflectivity.

0.500" -15 dB minimum 10GHz to 18 GHz
0.750" -15 dB minimum 8 GHz to 18 GHz
1.000" -15 dB minimum 6 GHz to 18 GHz

C-RAM HCGI X/Y:

Gradient loaded flat sheets with insertion loss tuned to customer requirements, where X = thickness in inches and Y = insertion loss in dB/inch. Maximum insertion loss is 20 dB/inch.

C-RAM HCUI X/Y:

Uniformly loaded flat sheets with insertion loss tuned to customer requirements, where X = thickness and Y = insertion loss in dB/inch. Maximum insertion loss is 30 dB/inch.

Note: pyramidal and wedge-shaped premium performance honeycomb absorbers are available as custom products. These are typically used in anechoic chambers as replacement for lower power handling foam pyramidal materials. Usually 12.0" and 18.0" pyramids and wedges are available, consult the factory for specific details.

TYPICAL PROPERTIES

Nominal Density: 4.5 lbs./ft³
Available thicknesses: 0.125, 0.250, 0.375,
0.500, 0.750, 1.000,
1.500, 2.000, 3.000,
and 4.000 inches.
Standard cell size: 3/16 inch (1/8 and 1/4
inch also available)
Insertion loss: from 2 to 30 dB/inch
Reflectivity: 15 dB minimum,
20 dB avg. over range
Temperature range: -65 to +325 °F

Figure 1. Typical Reflectivity of C-RAM HCGR 1.00/15 3/16" cell, 1.00 inch thick


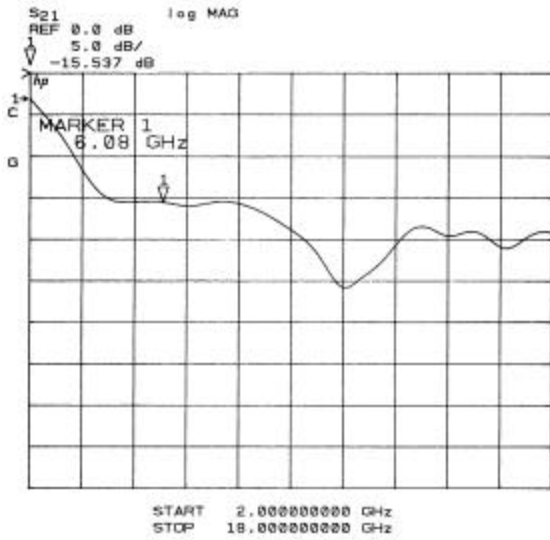


Figure 2. Typical Insertion Loss of C-RAM HCGR 1.00/20, 3/16" cell, 1.00 inch thick



The information in this Technical Bulletin, although believed to be accurate, is not to be taken as a warranty for which Cuming Corporation legal responsibility nor as permission or recommendation to practice any patented invention without license; it is offered for verification by the customer, who must make the final judgment of suitability for any application.

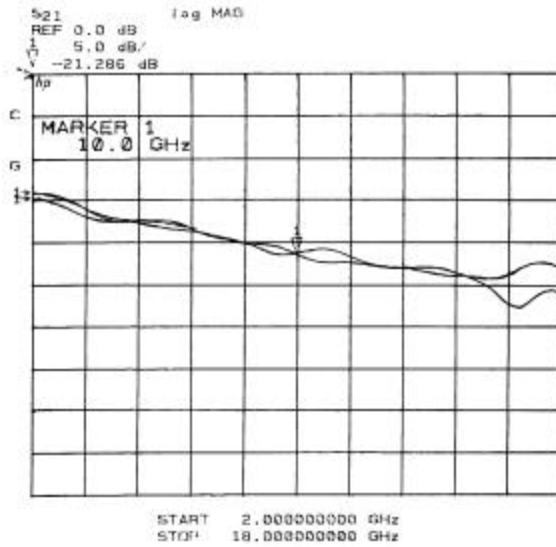