

Ethernet Control of High Power Amplifiers

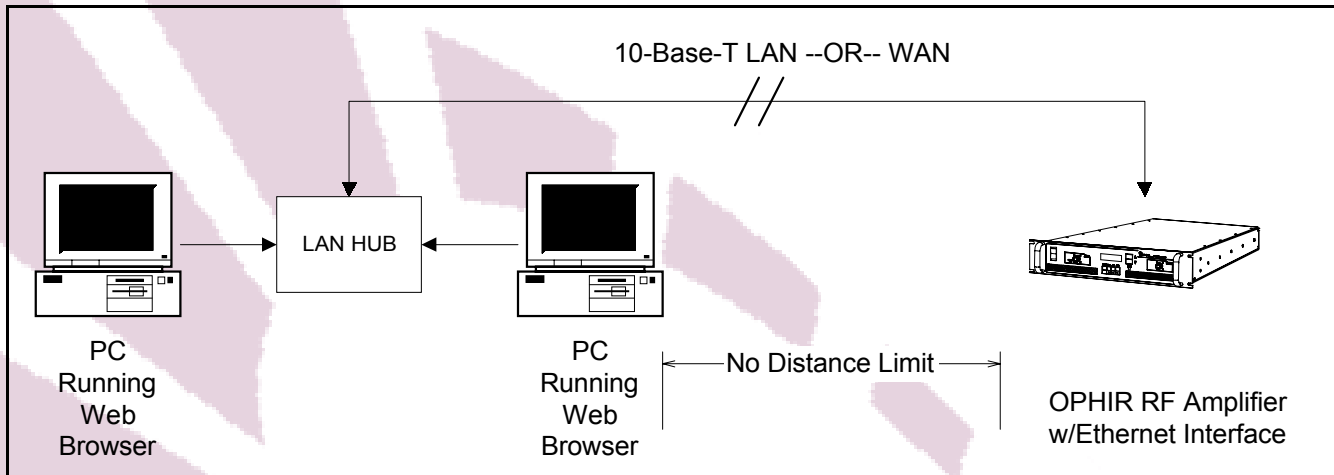


Figure 1. A standard amplifier connected to a 10-Base-T LAN or WAN. (RJ45 Connector)



Figure 2. PC Screen Shot

KEY BENEFITS:

- Takes advantage of readily available low cost technology.
- Only needs a regular PC with a standard web browser.
- Platform independent.
- Integrates easily into existing LANs or WANs.
- No distance limitation.