


SOLAR ELECTRONICS CO.

LINE IMPEDANCE STABILIZATION NETWORK

TYPE 9622-50-BP-10-BNC

CURRENT RATING 10 Amperes
IMPEDANCE 50 μ H
RECOMMENDED FREQUENCY RANGE 10 kHz - 50 MHz
VOLTAGE (line to ground) 270V., 50 - 60 Hz, 135V., 400 Hz
POWER CONNECTIONS 3/4" Standard Binding Post
RF CONNECTOR Type "BNC"
COUPLING CAPACITOR 0.25 μ F
CIRCUIT Single
CASE SIZE 4.5" (11.43cm) X 4.5" (11.43cm) X 9.25" (23.5cm)

REMARKS: Designed for **FCC part 15**, **ANSI C63.4-1992**, **CISPR PUB 16-1987** (150 kHz - 30 MHz),
Mil-Std-461D/E.

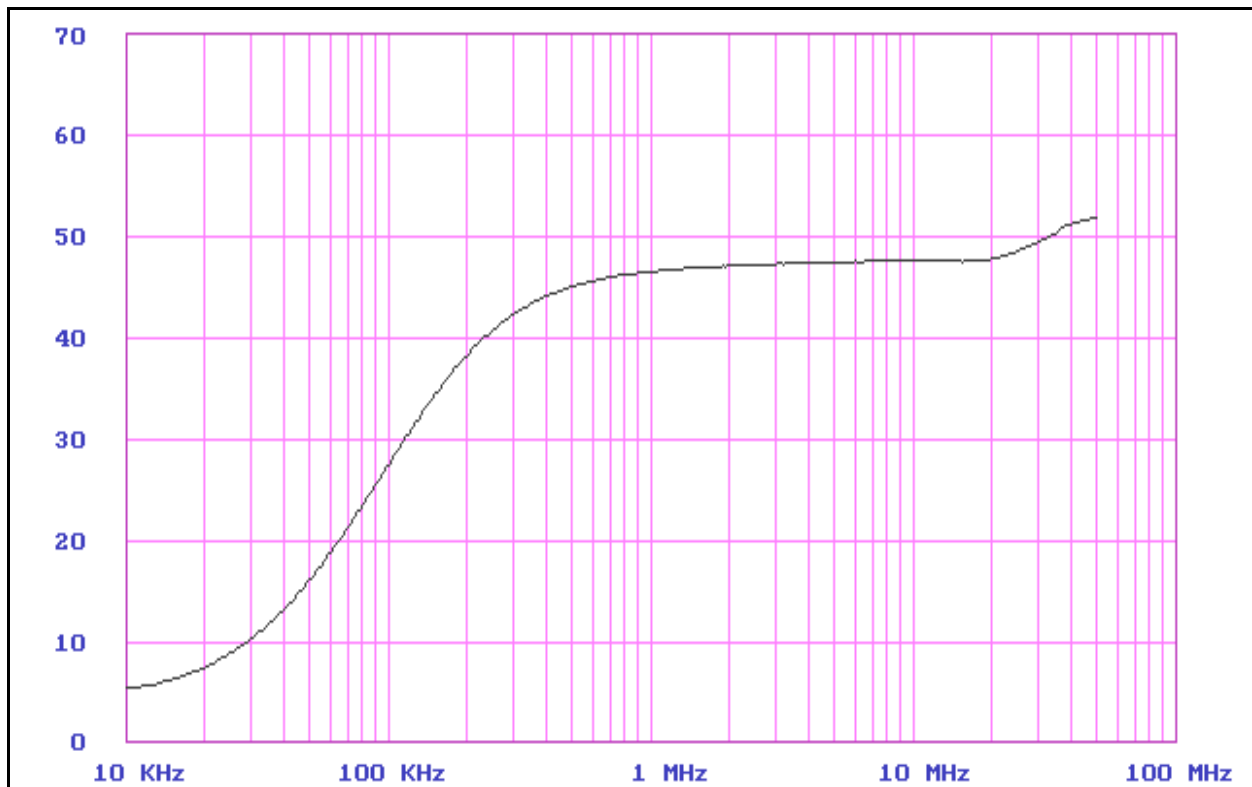

Typical Impedance in a 50 ohm circuit

SOLAR ELECTRONICS COMPANY

a Division of A.T. Parker, Inc.

10866 Chandler Boulevard

North Hollywood, California 91601

Phone: 818-755-1700, Fax.: 818-755-0078, email: sales@solar-emc.com