


AL5 Shielding Effectiveness (Butt Joint & Seam Taped) Tested per IEEE-299 : 2006

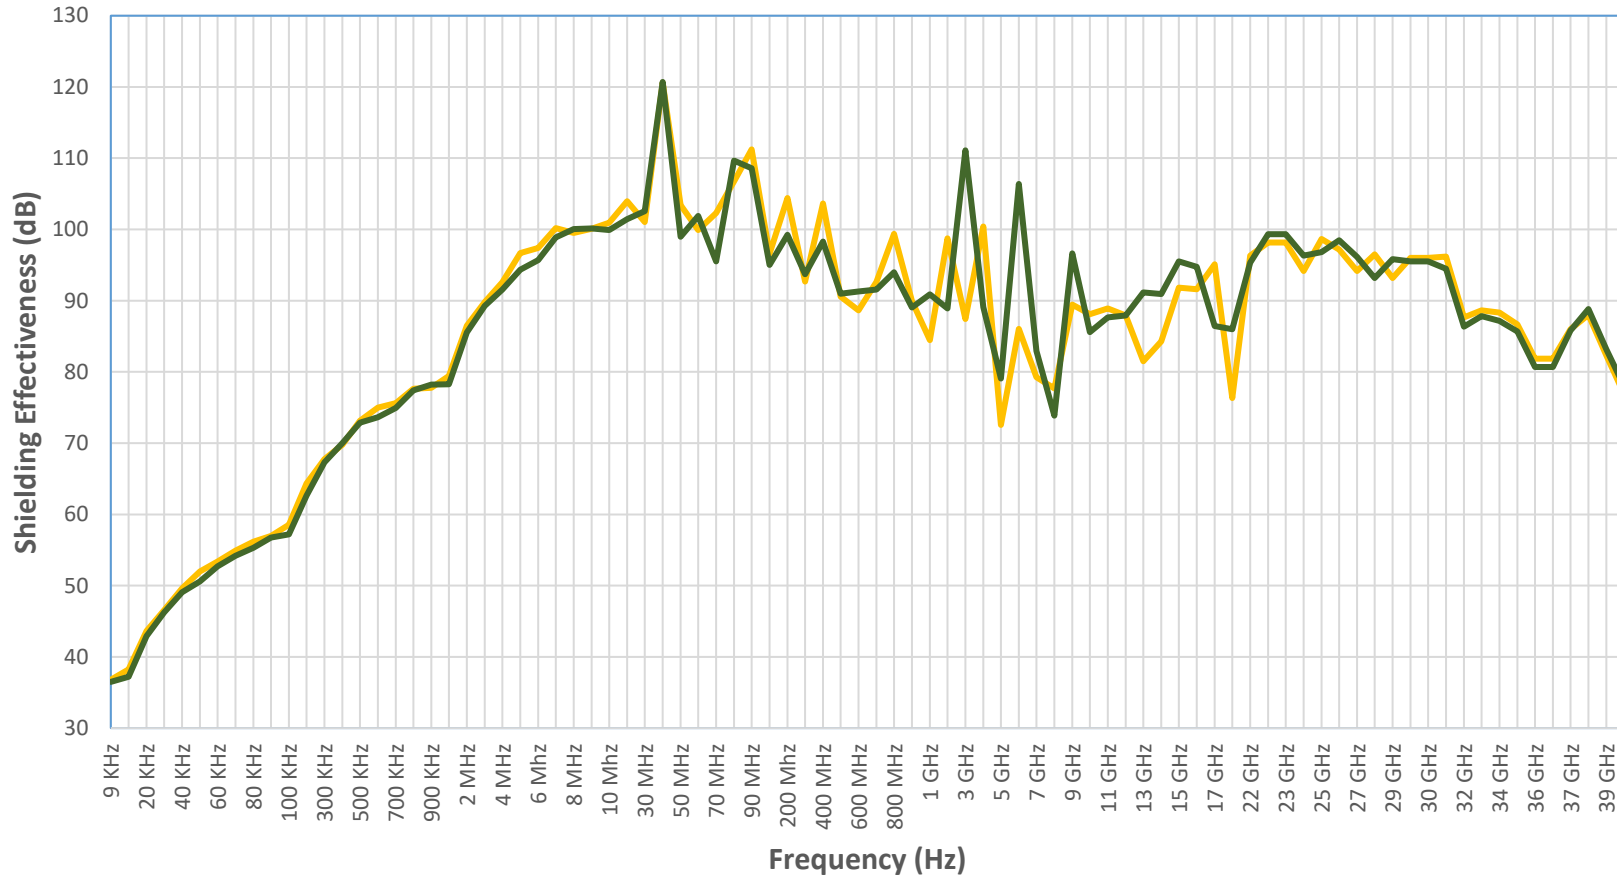

— 1235/1145-0 .005" aluminum with .005" x 4.00" EC aluminum tape (no abrasion prior to taping)

— 1235/1145-0 .005" aluminum with .005" x 4.00" EC aluminum tape (scotch brite tape area prior to putting tape down)