


CU50 Shielding Effectiveness (Butt Joint Seam Taped) Tested per IEEE-299 : 2006

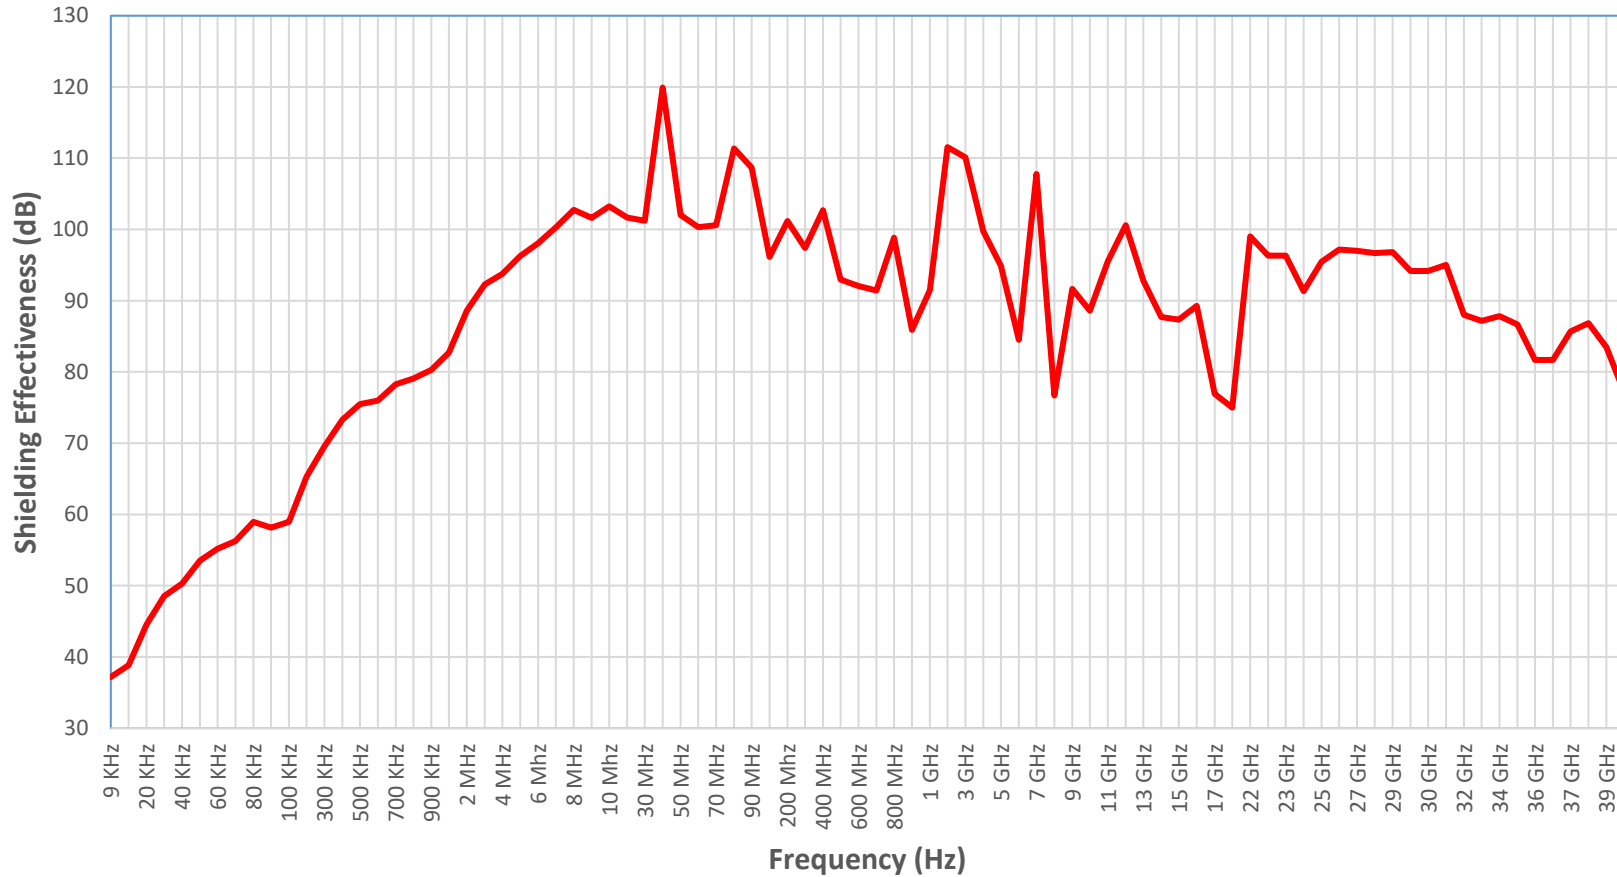

— 110-ANN .005" copper with .005" x 4.00" EC copper tape