



AMP2073 SOLID STATE HIGH POWER AMPLIFIER

FEATURES

- Small and light weight rack mounted chassis
- Class AB linear GaN Hybrid design
- Instantaneous Ultra-broadband
- Suitable for all single channel modulation standards
- Built-in protection circuits
- Universal voltage AC power supply
- High reliability and ruggedness



ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	2.0 - 18.0 GHz	
Power Output	10 Watt Min	CW
Power Gain	40 dB Min	
Power Gain Flatness	6.0 dB p-p Max	At rated Pout
Input Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	-30 dBc Typ	30dBm/Tone, $\Delta = 1\text{MHz}$
Harmonics	-20 dBc Typ	At rated Pout
Spurious	-60 dBc Max	Non-harmonics
Noise Figure	10 dB Max	
Operating Voltage	100 - 240 VAC	50/60Hz
Power Consumption	200 Watt Max	At rated Pout
Max Input Power Protection	+3 dBm	<10 Sec without damage
Load VSWR Protection	5: 1	<1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS


Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50°C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	430 x 89 x 560 mm (17 x 3.5 x 22 inch)	2U, excluding handles
Weight	9 kg.	
RF Connectors In/Out	SMA Female	Front Panel Standard
AC Power / Interface Connector	IEC 60320-C14 / 9-Pin D-Sub	
Cooling	Built in Fan Cooling	
OPTIONAL: Digital Monitor & Control FWD, REV, VSWR, GAIN, ALC, V & I, TEMP	Ethernet RJ-45 TCP/IP, RS422/485 Optional GPIB Interface	Remote Bluetooth application

AMP2073 SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING WITH DIGITAL CONTROL (LCD)

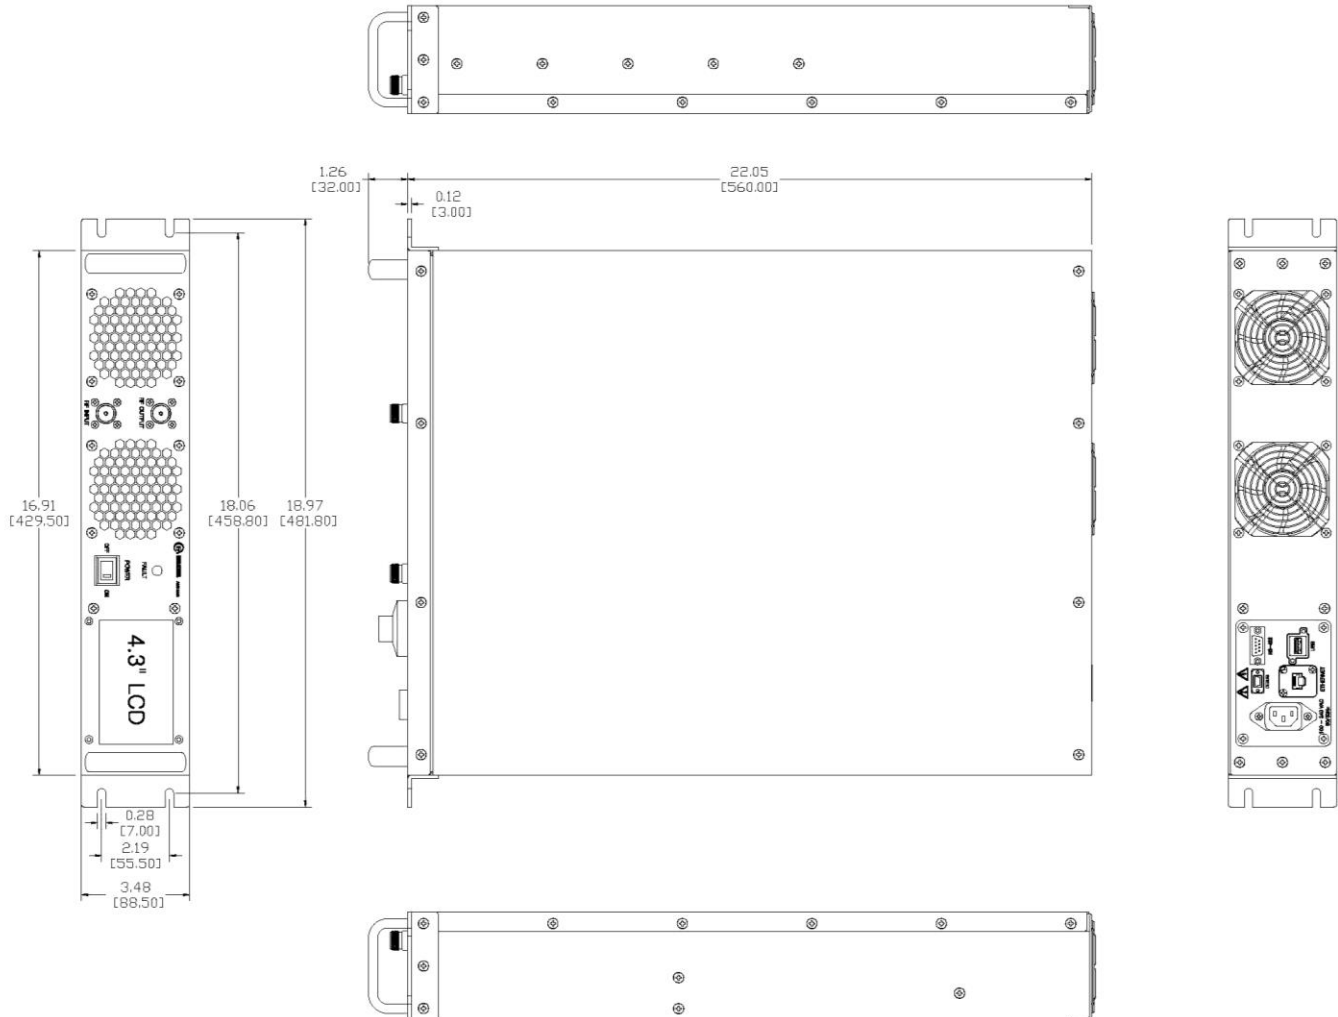

AMP2073 SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING WITH MANUAL GAIN ADJUSTMENT

