



AMP2101 SOLID STATE HIGH POWER AMPLIFIER

FEATURES

- Class AB linear GaN design
- Instantaneous ultra-wide bandwidth
- Rack mounted system
- Designed for broadband EMI/RFI, Lab, Comm. and EW applications
- Suitable for all single channel modulation standards
- Built-in protection circuits
- High reliability and ruggedness



ELECTRICAL SPECIFICATIONS: 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	2.0 - 6.0 GHz	
Power Output	35 Watt Min	CW
Power Gain	46 dB Min	
Power Gain Flatness	3.0 dB p-p Max	
Input Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	<-30 dBc Typ	35dBm/Tone, Δ = 1MHz
Harmonics	<-20 dBc Typ	At rated Pout
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	100 - 240 VAC	
Power Consumption	500 Watt Max	At rated Pout
Input Power Protection	+8 dBm Max	<10 Sec without damage
Load VSWR Protection	∞ : 1	<1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensing


MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	430 x 88 x 562 mm 430 X 133 X 500 mm	2U - Excluding handles 3U Benchtop
Weight	10 kg.	
RF Connectors In/Out	Type-N Female	
AC Power / Interface Connector	IEC 60320-C14 / 9-Pin D-Sub	
Cooling	Built in Fan Cooling	
OPTIONAL: Digital Monitor & Control FWD, REV, VSWR, GAIN, ALC, V & I, TEMP	Ethernet RJ-45 TCP/IP, RS422/485, USB Optional GPIB Interface	Optional Remote Bluetooth application

AMP2101 SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

Shown without optional front panel display/controller & remotes

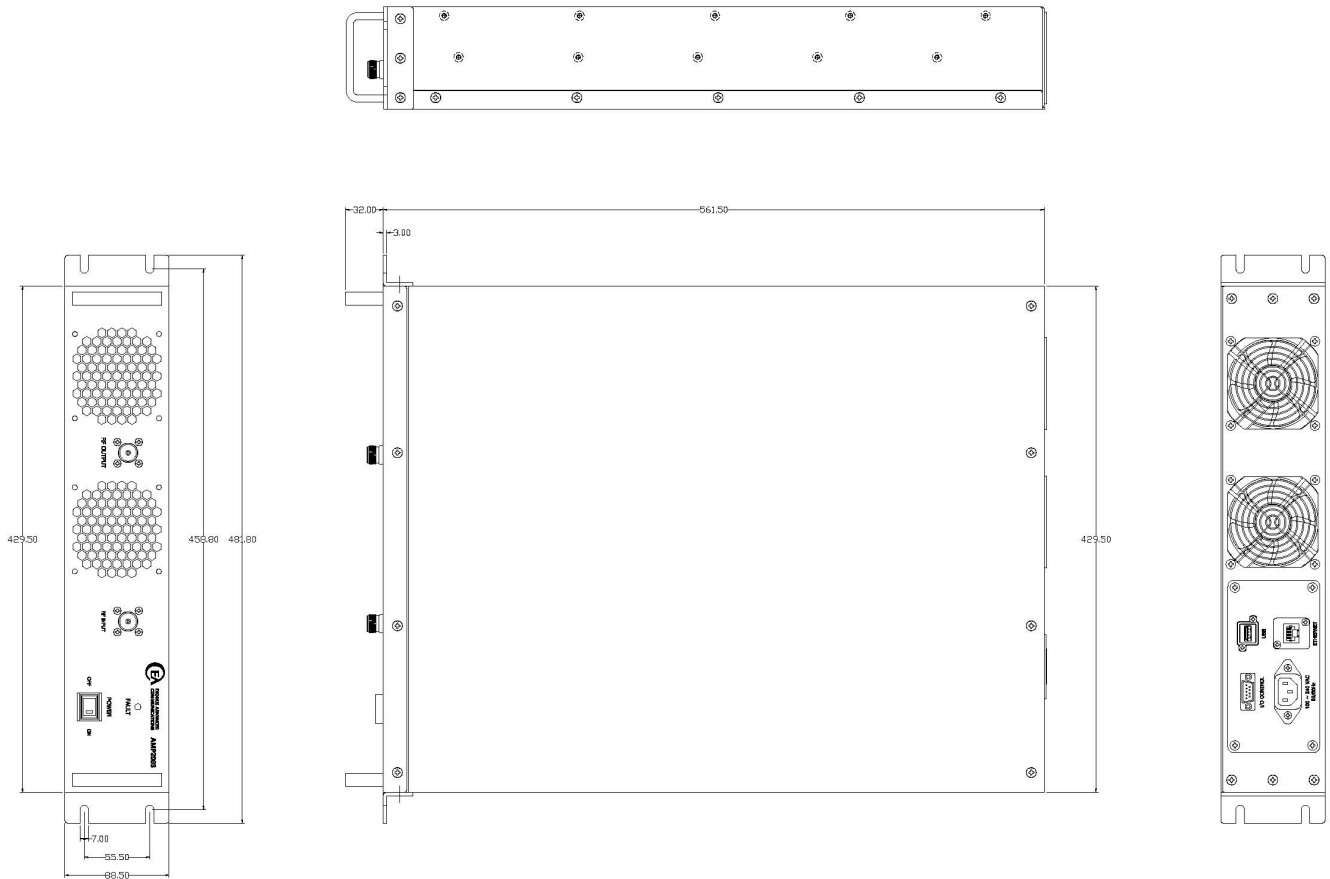

AMP2101 SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING - BENCHTOP

