

REVISIONS			
SYM.	DESCRIPTION	DATE	APPROVAL
-	PRELIMINARY DRAWING	10-25-17	-
-	-	-	-
-	-	-	-

ACCESSORIES:


- A. POLYVINYL AND MASONITE UNDERLAYMENT
- B. ONE (1) RF SHIELDED PERSONNEL DOOR WITH CLEAR OPENING 3'-0" X 7'-0", TYPE RCM-154.
- C. ONE (1) 3/8" BRASS GROUND STUD
- D. ONE (1) DUAL (2-WIRE) 30 AMPERE POWER FILTER MODEL USC-50-2X30-60 Hz A.C.
- E. ONE (1) R.F. PENETRATION PANEL (12" X 12")
- F. ONE (1) GIGAFOIL 10/100/1000 FOIL ETHERNET FILTER 100dB PERFORMANCE FROM 10kHz TO 10G Hz+ FIBER OPTIC ISOLATION LINK (FOIL) TECHNOLOGY
- G. ONE (1) LITHONIA LBL4LP840 SURFACE MOUNT LED LIGHT FIXTURE (ARE DIMMABLE) WILL BE INSTALLED ON CEILING
- H. ONE (1) 1.0" I.D. THREADED PIPE PENETRATION WITH ISOLATOR WILL BE INSTALLED IN CENTER OF THE CEILING
- I. ESD VINYL FLOOR TILE INSTALLED BETWEEN FLOOR FRAMING MEMBERS

NOTE:


1. PARENT ROOM FLOOR MUST BE FLAT AND LEVEL WITH IN 1/4" EVERY 10'-0" (NON-ACCUMULATIVE). *NOT BY UNIVERSAL SHIELDING CORP. *PARENT ROOM FLOOR, WALLS AND CEILING MUST BE FREE OF ANY OBSTRUCTIONS.
2. FINAL FABRICATION CANNOT BE COMPLETED UNTIL DRAWING(S) IS/ARE APPROVED BY CUSTOMER
3. ALL ELEVATIONS ARE SHOWN FROM INSIDE OF RF. ENCLOSURE.

DESIGN DETAILS ARE ILLUSTRATED ON SHEET 2

ALL CUTOUTS TO BE FIELD LOCATED

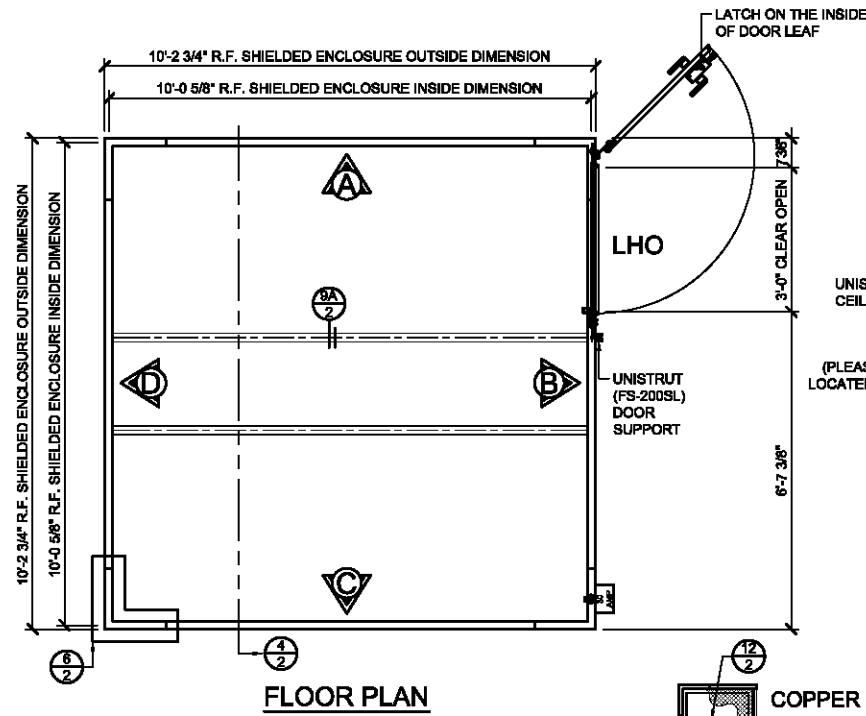


FLOOR PLAN

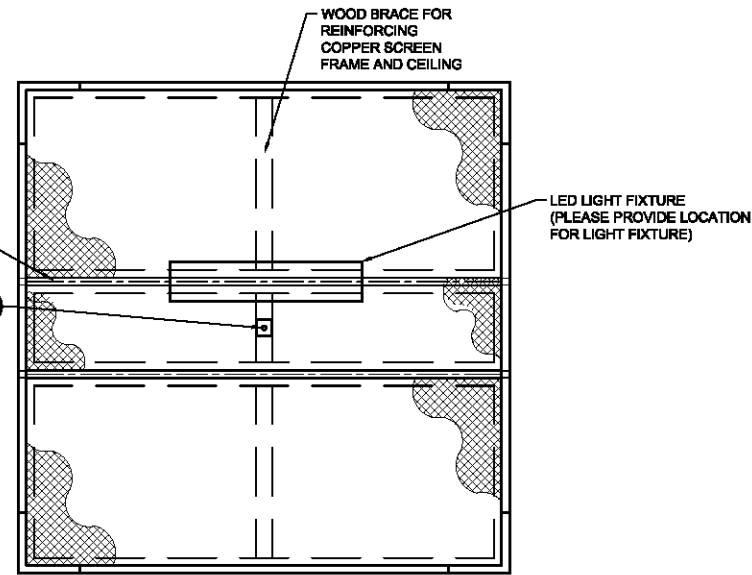


CEILING PLAN




COPPER SCREEN AREA

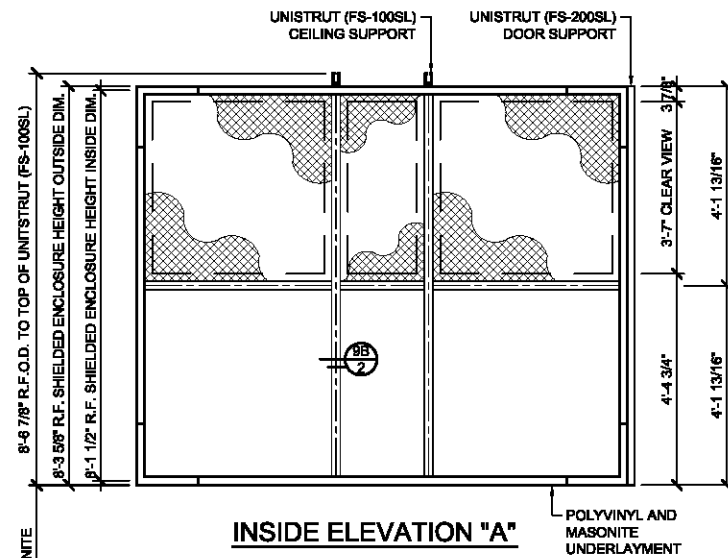


INSIDE ELEVATION "A"

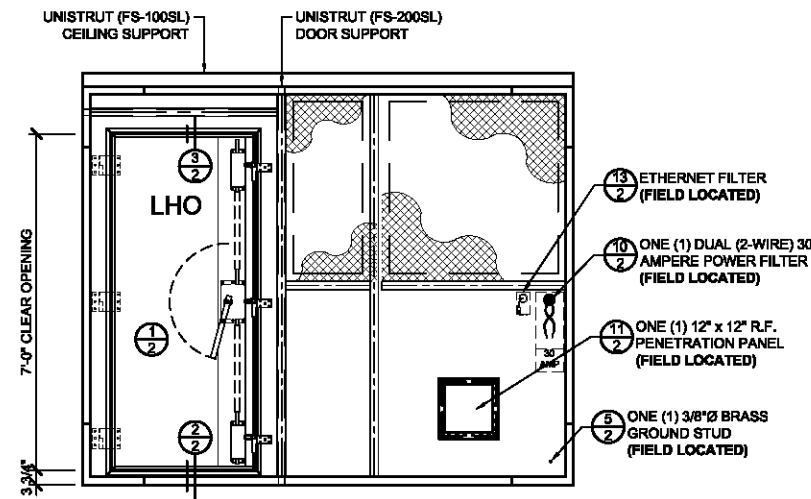


INSIDE ELEVATION "B"

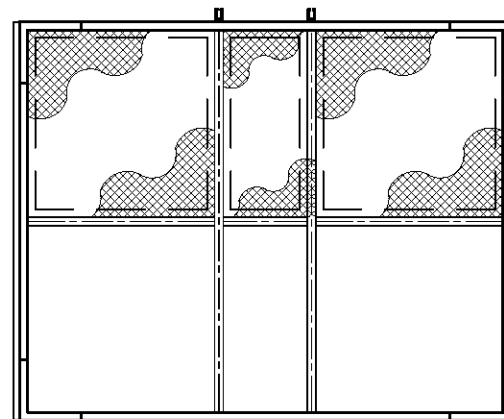

INSIDE ELEVATION "C"

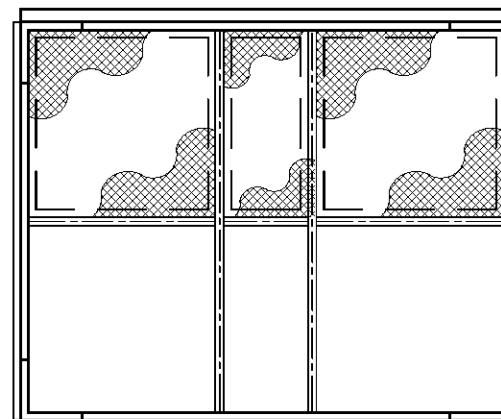

INSIDE ELEVATION "D"

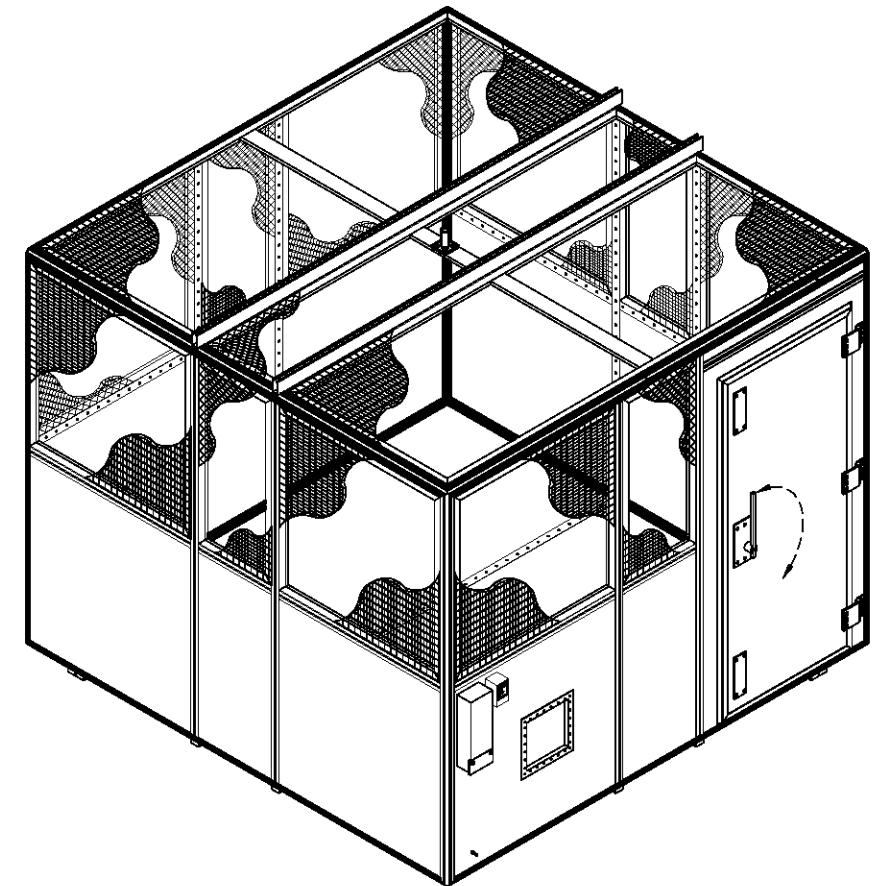

ISOMETRIC VIEW

R.F. SHIELDED ENCLOSURE -		HEAT TREAT WEIGHT	
USC-44	TITLE: ANDERSEN CORP. 100 4TH AVE. N BAYPORT, MN 55003	UNIVERSAL SHIELDING CORP.	
SCALE: 1/2"=1'-0"	DRAWN: LESLIE W. DATE: 10-25-17	SIZE	DRAWING NUMBER
REVISD:	CHECKED: - DATE: -	APPROVED: - DATE: -	ISSUE
		D	USC-19631Y

