

L-Band 2.0 kW TWT Compact Pulsed Amplifier

VZL3529J1

Features:

- Rack mount
- Coaxial output
- GPIB remot
- Compact high pulsed power
- Single phase AC power
- Local or remote control
- Wide RF bandwidth up to 2.5 GHz
- Up to 4% duty cyclee

Benefits:

- Versatile
- Suitable for lab environments
- Designed for the global market
- Modular design and built-in fault diagnostics for easy maintenance
- Wide RF bandwidth reduces number of required amplifiers



Applications:

- Test and measurement systems

Compact

Five rack-units tall (8.75 in/222 mm).

Versatile

Wide band, automatic fault recycle, user-friendly microprocessor-controlled logic with integrated computer interface, digital metering, and quiet operation suitable for laboratory environments.

An integral solid state preamplifier and IEEE interface are included as standard features.

Global Applications

230 VAC operation. Designed to meet International Safety Standard EN61010 and Electromagnetic Compatibility EMC 2004/108/EC.

Easy to Maintain

Modular design and built-in fault diagnostic capability.

Worldwide Support

Backed by more than 50 years of high power experience, CPI's worldwide 24-hour customer support network includes more than 20 regional factory service centers.




L-Band 2.0 kW TWT Compact Pulsed Amplifier - VZL3529J1

| Specifications | |
|---------------------------------|---|
| Frequency | 1.0 to 2.5 GHz |
| Output Power at Flange | 2000 W (see page 3 Power Plot) |
| Gain | 63 dB min. at rated power; >65 dB min. at small signal |
| Gain Adjustment Range | 20 dB min. |
| Input VSWR | 2.5:1 typical |
| Output VSWR | 2.5:1 typical |
| Load VSWR | 1.5:1 max. for full spec. compliance; may oscillate with unshielded opening due to coupling 70 input. Should not be tested with connector off. |
| Pulse Width | 0.1 μ s to 100 μ s |
| PRF | 50 kHz max. |
| Duty Cycle | 4% max. |
| Delay | 400 ns typical |
| Droop | 0.5 dB over 50 μ s |
| NPO | -15 dBm/MHz Beam On; -110 dBm/MHz Beam Off |
| Primary Power | 220 - 240 VAC, single phase 47- 63 Hz |
| Power Consumption | 1.2 kVA typical |
| Filament Voltage | Reduction of 10% in standby for extended TWT life |
| Inrush Current | 200% max. |
| Ambient Temperature | -10° to +40°C operating -40° to +70°C non-operating |
| Relative Humidity | 95% non-condensing |
| Altitude | 10,000 ft. with standard adiabatic derating of 2°C/1000 ft., operating; 40,000 ft., non-operating |
| Shock and Vibration | As normally encountered in a protected laboratory environment |
| Cooling (TWT) | Forced air with integral blower Rear air intake & exhaust; 0.10" water max. external pressure loss allowable |
| RF Input Connection | Type N female |
| RF Output Connection | Type N female |
| RF Output Monitor/sample | Type N female, -46 dB nominal |
| Dimensions (W x H x D)* | 19 x 8.72 x 26 in. (483 x 221 x 661 mm) |
| Weight | 150 lbs (68 kg) max. |
| Heat Dissipation | ≈720 W |
| Safety | EN61010 |
| Acoustic Noise | 65 dBA @ 3 ft. from amplifier |

The values listed above represent specified limits for the product and are subject to change. The data should be used for basic information only. Formal, controlled specifications may be obtained from CPI for use in equipment design.

For information on this and other CPI products visit our webpage at www.cpii.com/BMD, or contact:
CPI Beverly Microwave Division, +1(978) 922-6000 • FAX: +1 (978) 922-8914 • BMDmarketing@cpii.com

L-Band 2.0 kW TWT Compact Pulsed Amplifier - VZL3529J1

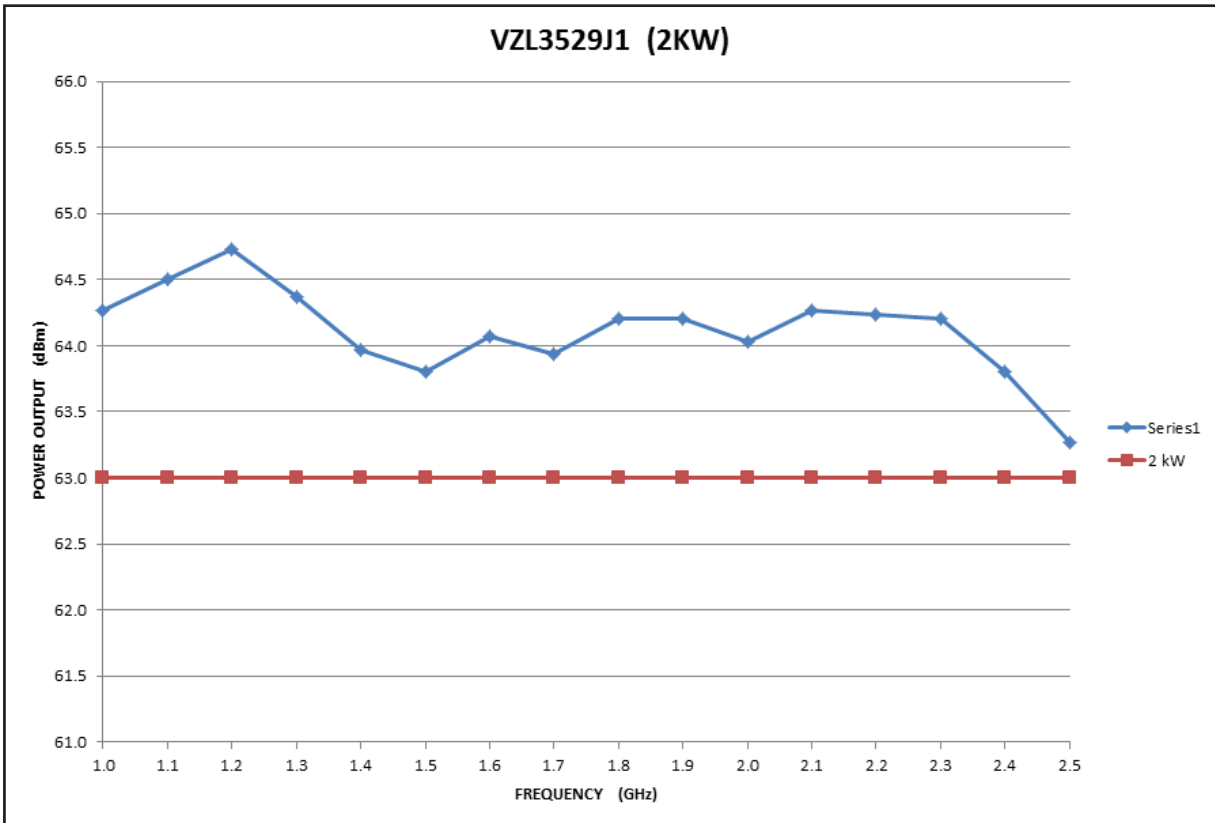

The values listed above represent specified limits for the product and are subject to change. The data should be used for basic information only. Formal, controlled specifications may be obtained from CPI for use in equipment design.

**For information on this and other CPI products visit our webpage at www.cpii.com/BMD, or contact:
CPI Beverly Microwave Division, +1(978) 922-6000 • FAX: +1 (978) 922-8914 • BMDmarketing@cpii.com**