

# AMP4009 SOLID STATE HIGH POWER AMPLIFIER

## FEATURES

- Rack mounted system
- Class AB linear GaN design
- Instantaneous wide bandwidth
- Suitable for all modulations standards
- Built-in protection circuits
- High reliability and ruggedness



## ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	2.0 - 3.0 GHz	
Power Output CW	10 Watt Min	CW
Power Output @ P1dB	8 Watt Typ	
Power Gain	40 dB Min	
Power Gain Flatness	2.0 dB p-p Max	Constant input power
Input Return Loss	10dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	30 dBc Typ	30dBm/Tone, $\Delta = 1\text{MHz}$
Harmonics	25 dBc Typ	At rated Pout
Spurious	60 dBc Min	Non Harmonics
Operating Voltage	100 - 240 VAC	
Power Consumption	80 Watt Max	At rated Pout
Max Input Power	+8 dBm	Without damage
Load VSWR Protection	$\infty : 1$	

## ENVIRONMENTAL CHARACTERISTICS


Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non Condensation

## MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	230 x 89 x 265 mm 430 x 88 x 561 mm	Bench-Top excluding handles 2U, excluding handles
Weight	9 kg.	
RF Connectors In/Out	Type-N Female	Front Panel Standard
AC Power / Interface Connector	IEC 60320-C14 / 9-Pin D-Sub	
Cooling	Built in Fan Cooling	
OPTIONAL: Digital Monitor & Control FWD, REV, VSWR, GAIN, ALC, V & I, TEMP	Ethernet RJ-45 TCP/IP, RS422/485, Optional GPIB Interface	Remote Bluetooth application

# AMP4009 SOLID STATE HIGH POWER AMPLIFIER

## BENCH TOP CHASSIS

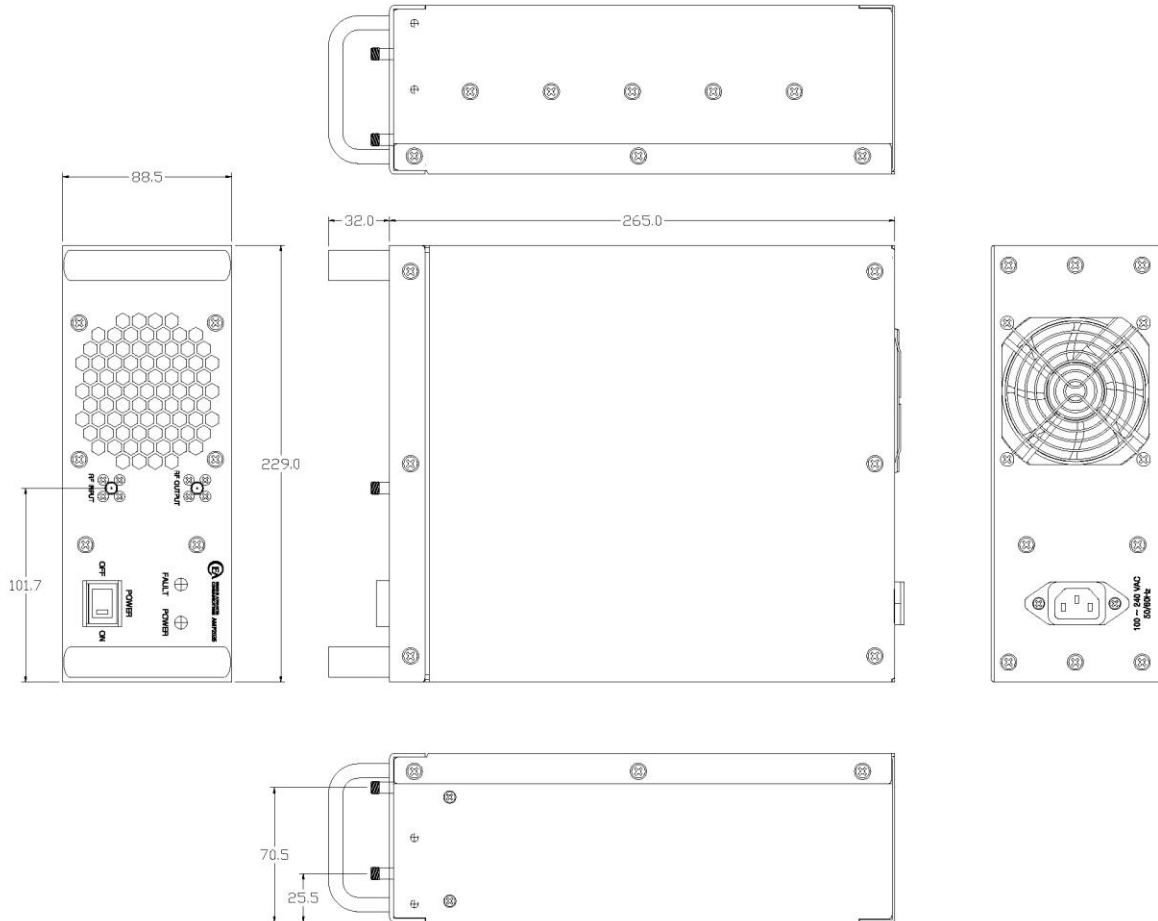

# AMP4009 SOLID STATE HIGH POWER AMPLIFIER

## 2U CHASSIS

