


EFTC 2012

Capacitive Coupling Clamp
for Burst / EFTG impulses

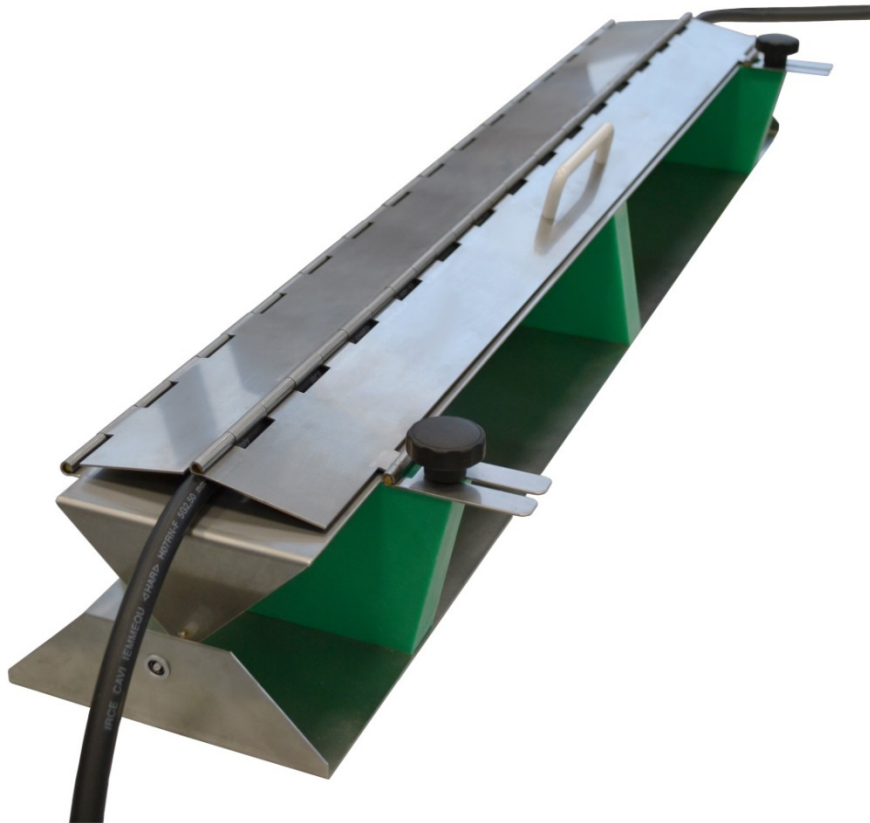

According to

IEC 61000-4-4 : 2012 Ed 3.0

IEC 61000-4-4 : 2004 Ed 2.0

The Capacitive Coupling Clamp, EFTC 2012, provides the ability to couple Burst / EFT pulses to data lines. It can also be used for coupling to main lines where no CDN is available, for example high current lines >200 A.

Calibrated with calibration kit acc. to IEC 61000-4-4 : 2012 Ed 3.0

Technical Specification	EFTC 2012
Dimensions: W * H * L	140 * 180 * 1100 mm ³
Incl. coaxial connection cable, Fischer Coax	ca. 1 m long
Max. cable diameter	ca. 42 mm