

AMP1014 SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB linear LDMOS design
 Instantaneous wide bandwidth
 Suitable for all single channel modulation standards
 Built-in monitoring and protection circuits
 Small form factor, light weight
 High efficiency, reliability and ruggedness



ELECTRICAL SPECIFICATIONS: 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	20 - 520 MHz	
Power Output Psat	100 Watt Min	CW
Power Gain	50 dB Min	
Power Gain Flatness	3.0 dB p-p Max	
Input Return Loss	-10 dB Max	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	-30 dBc Typ	40dBm/Tone, Δ = 1MHz
Harmonics	2nd <-35dBc Typ 3rd <-15dBc Typ	At rated Pout
Non-Harmonics Spurious	-60 dBc Max	
Operating Voltage	28 VDC Nom	
Current Consumption	9 Amp Max	At rated Pout
Input Power Protection	+8 dBm Max	<10 Sec without damage
Load VSWR Protection	∞ : 1	<1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +75 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensing

MECHANICAL SPECIFICATIONS


Parameter	Specification	Notes
Dimensions	Option-00 - 162 x 96 x 27 mm Option-01 - 200 x 100 x 27 mm	Excluding connectors
Weight	950 gr.	Without heatsink
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	9-Pin D-Sub	
Cooling	External Heatsink	Forced air required

D-SUB CONNECTOR PIN ASSIGNMENT


Pin	Function	Description
1	FWD	Option-101 - Analog Forward Power Indicator
2	VVA	Option-103 - Analog Gain Control
3	CURRENT SENSOR	I _b @20mV/100mA Typ
4	TEMP SENSOR	V _T @10mV/°C + 500mV Typ
5	SHUTDOWN	TTL
6, 7	VDD	28VDC
8, 9	GND	Ground

AMP1014 SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING – STANDARD

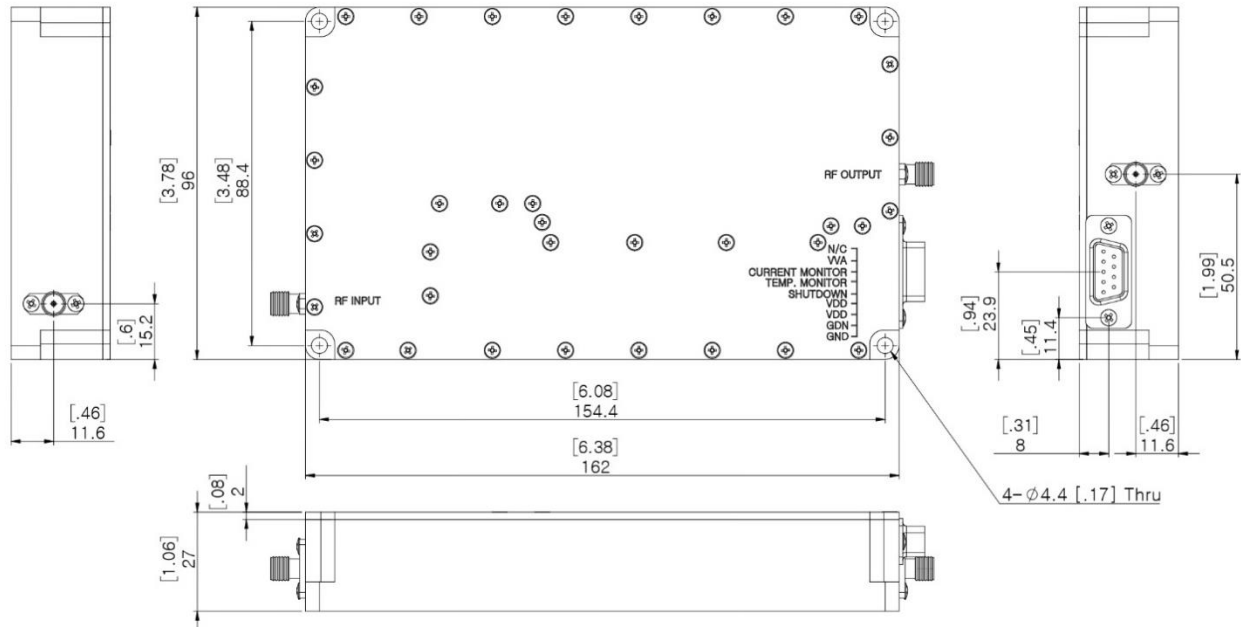


OUTLINE DRAWING - OPTION 101 & 103

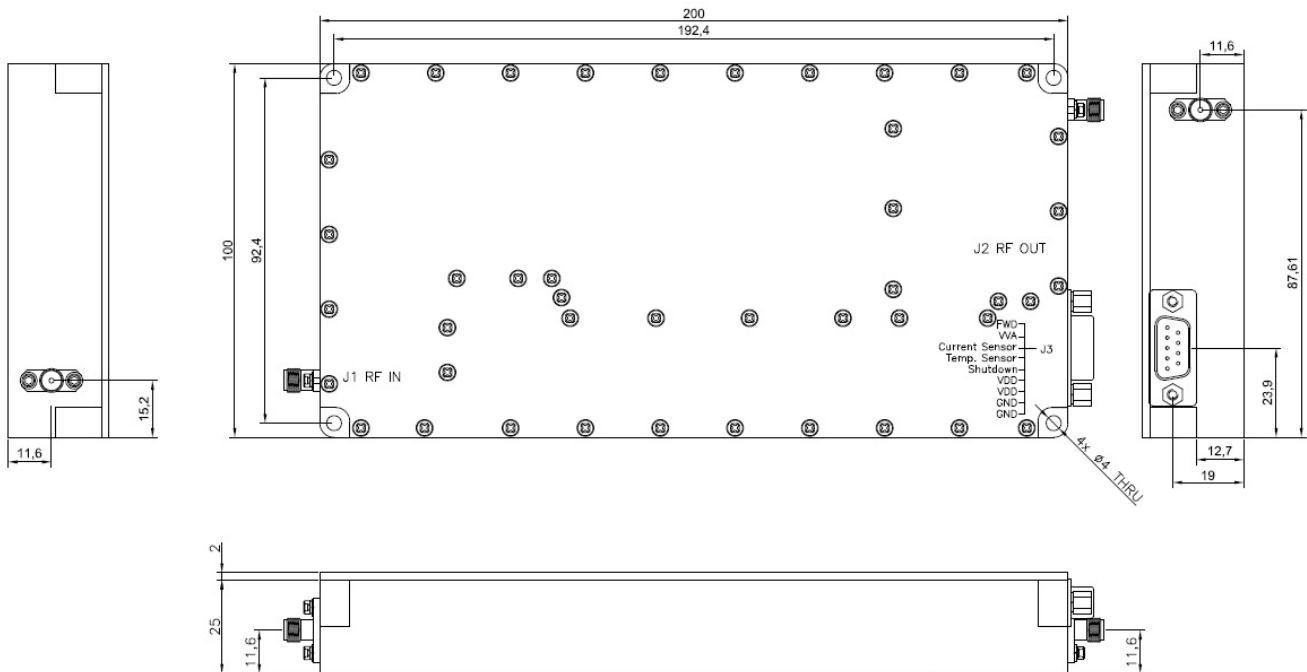

OPTION ORDERING INFORMATION:

OPTION	Function	Description
01	FWD	Forward Power Detector
03	VVA	Variable Voltage Attenuator

OUTLINE DRAWING WITH OPTIONAL HEATSINK

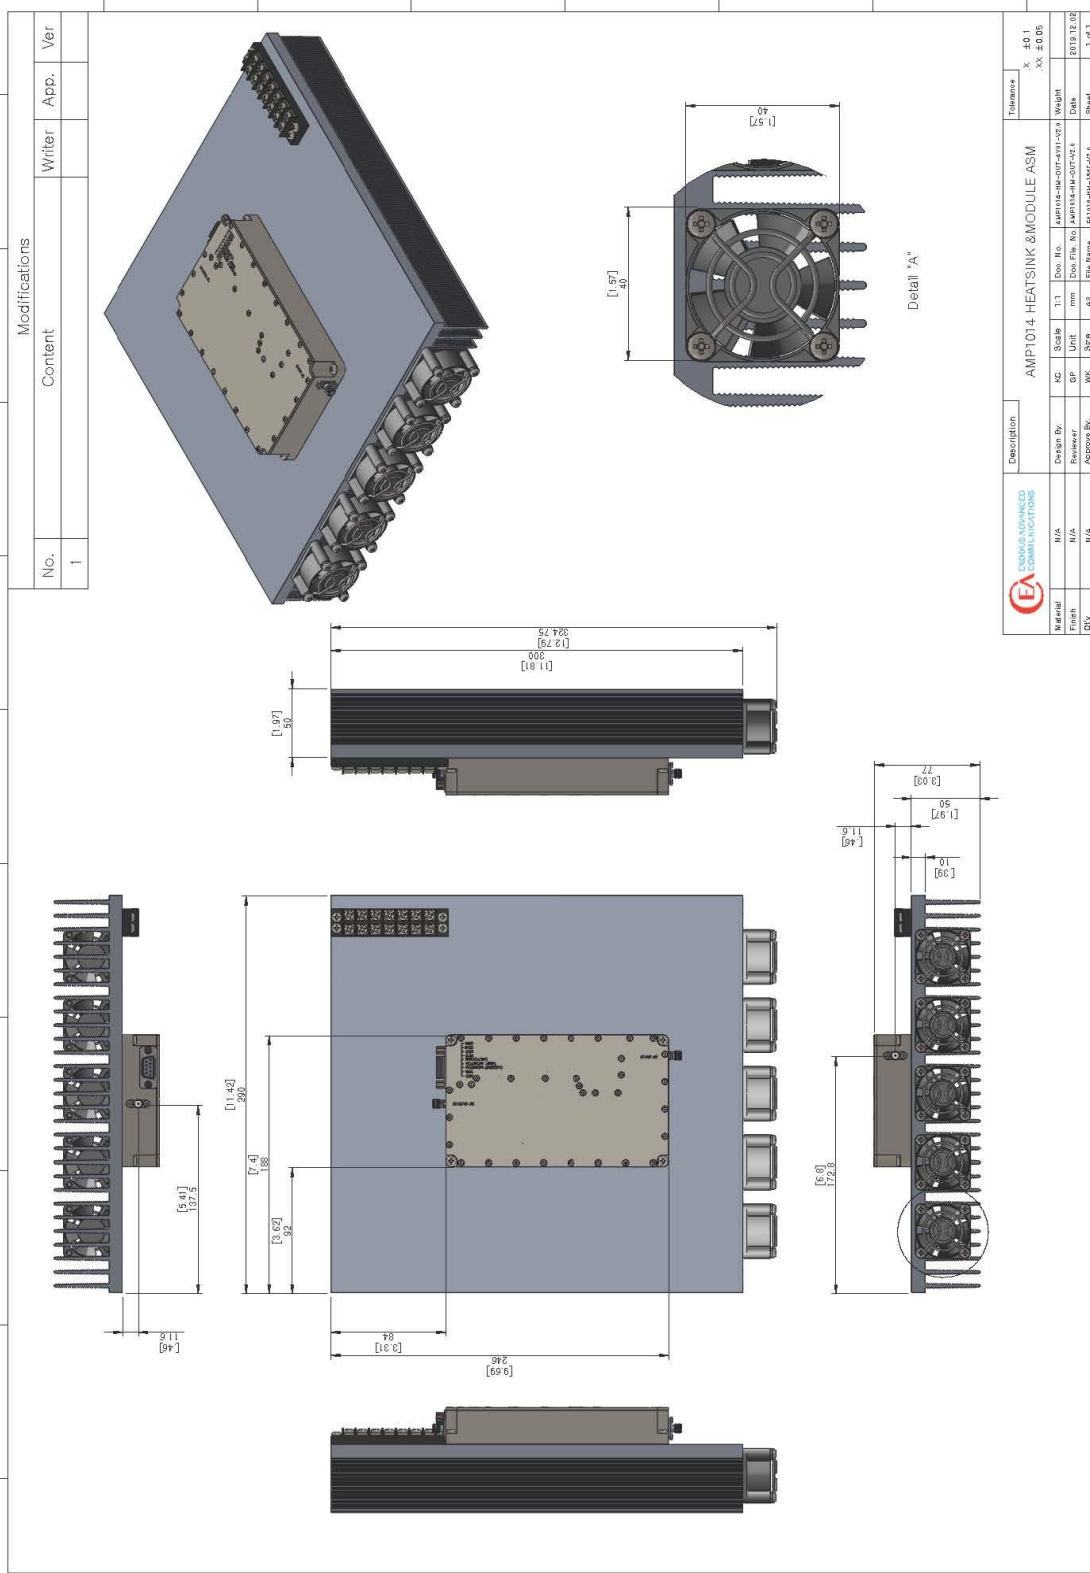

Modifications			
No.	Content	Writer	App. Ver
1			

Description		Tolerance	
AMP1014 HEATSINK & MODULE ASM		X	±0.1
		XX	±0.05
Material	N/A	Design By	JAPN13414-DAT-V2.4
Finish	N/A	Drawn By	JAPN13414-DAT-V2.4
Qty	N/A	Receiver	GP
		Approve By	WK
		Unit	mm
		Scale	A3
		File Name	141014HSK-Mod-V2.4
		Sheet	1 of 1
		Date	2013.12.02
		Weight	